



CARATTERISTICHE STANDARD


- I pannelli laterali sono rivestiti internamente ed esternamente in lamiera prevverniciata atossica.
- I pannelli pavimento sono rivestiti internamente in lamiera plastificata antiscivolo.
- Tutti i pannelli sono isolati con iniezione di poliuretano densità Kg/m³ 40±2.
- Serraggio: con fasteners a doppio aggancio e sistema di centraggio FAST-FIT
- Porta: mod. PP65 per temperatura positiva e PN65 per temperatura negativa, luce di servizio cm 65x187, apertura destra o sinistra, completa di chiusura con chiave e sblocco interno.

STANDARD FEATURES

- The wall panels are internally and externally clad with non-toxic prepainted steel sheet.
- The floor panels are lined internally with anti-slip plastic-clad sheet steel.
- All panels are insulated with injected polyurethane, density 40 Kg/m³±2.
- Assembly: with twin-hook fasteners patented FAST-FIT centering system
- Door: model PP65 for positive and PN65 for negative temperature, clear passage 65x187 cm; right or left hand door opening, with key lock and internal safety release.

S6	S10	S6	S10
hi 203	hi 203	hi 243	hi 243
he215	he223	he255	he263

Nuovo Angolare brevettato New patented edge

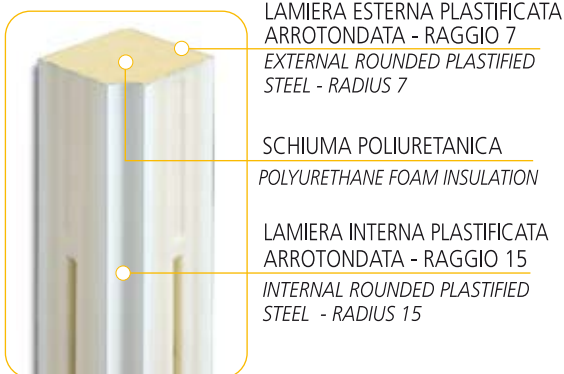

Piante Minicelle - Minicoldrooms plants



NB.

Per ottenere le dimensioni esterne, si devono aggiungere alle quote indicate **cm12xS6 - cm20xS10**

In order to obtain ext. dim. of the coldrooms **cm12xS6 - cm20xS10** must be added to the above measurements.

